


Blast Hose & Fittings

ABSS DuraBlast Premium Blast Hose

Pressure Rated to 10 Bar (150psi) Working Pressure
 Safety Factor 3:1
 Temperature Rated -30°C to + 80°C

Construction

Tube- Premium Black Conductive NR
 Reinforcement - High Textile Cords
 Cover - Black Conductive SBR/NR Pin Pricked

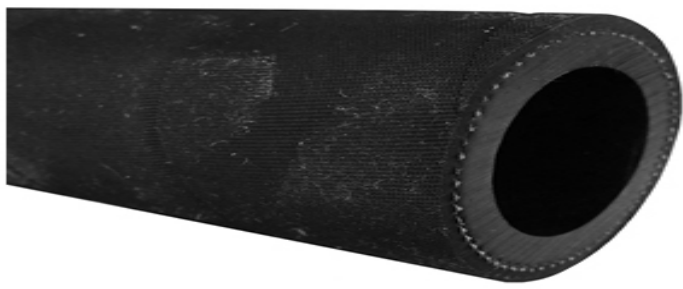

Light Wall - 2ply

Comes in Sizes

13mm ID x 27mm OD
 20mm ID x 34mm OD
 25mm ID x 40mm OD
 32mm ID x 48mm OD
 38mm ID x 55mm OD
 Standard length - 20 Metres



Heavy Wall - 4ply

Comes in Sizes

13mm ID x 34mm OD
 20mm ID x 40mm OD
 25mm ID x 48mm OD
 32mm ID x 55mm OD
 38mm ID x 60mm OD
 Standard length - 20 Metres

Nozzle Holders & Couplings

Nozzle Holders



Aluminium



Nylon

Couplings




Nylon



Brass

Threaded Pot Couplings

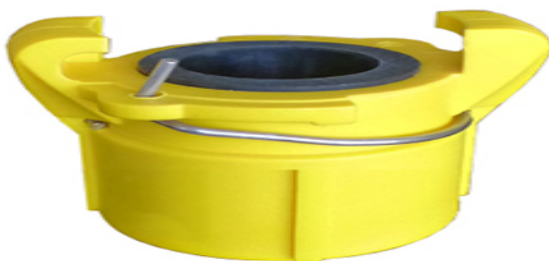

Nylon



Steel



Brass

Whip Checks



www.abss.net.au



Victoria:

18 Beckett Avenue
 Keilor East, Vic 3033



1300 727 240



info@abss.net.au



NSW:

Unit 27
 274-276 Hoxton Park Road
 Prestons, NSW 2170



02 9607 9953

0411 653 972



info@abss.net.au